



# MMC and SD Media Driver for TI AM3xxx User Guide

Version 1.40

For use with MMC and SD Media Driver for TI AM3xxx versions 2.06 and above

Exported on 09/25/2018

All rights reserved. This document and the associated software are the sole property of HCC Embedded. Reproduction or duplication by any means of any portion of this document without the prior written consent of HCC Embedded is expressly forbidden.

HCC Embedded reserves the right to make changes to this document and to the related software at any time and without notice. The information in this document has been carefully checked for its accuracy; however, HCC Embedded makes no warranty relating to the correctness of this document.

## Table of Contents

<b>1</b>	<b>System Overview.....</b>	<b>3</b>
1.1	Introduction .....	4
1.2	Feature Check .....	5
1.3	Packages and Documents .....	6
	Packages.....	6
	Documents .....	6
1.4	Change History .....	7
<b>2</b>	<b>Source File List .....</b>	<b>8</b>
2.1	API Header File .....	8
2.2	Configuration File.....	8
2.3	Source Code .....	8
2.4	Platform Support Package (PSP) Files.....	8
2.5	Version Files.....	9
<b>3</b>	<b>Configuration Options .....</b>	<b>10</b>
<b>4</b>	<b>Application Programming Interface .....</b>	<b>11</b>
4.1	mmcsd_initfunc .....	11
4.2	F_DRIVER Structure .....	12
4.3	Error Codes.....	13
<b>5</b>	<b>Integration.....</b>	<b>14</b>
5.1	PSP Porting .....	14

# 1 System Overview

This chapter contains the fundamental information for this module.

The component sections are as follows:

- [Introduction](#) – describes the main elements of the module.
- [Feature Check](#) – summarizes the main features of the module as bullet points.
- [Packages and Documents](#) – the *Packages* section lists the packages that you need in order to use this module. The *Documents* section lists the relevant user guides.
- [Change History](#) – lists the earlier versions of this manual, giving the software version that each manual describes.


**Note:** To download this manual as a PDF, see [File System Media Driver PDFs](#).

## 1.1 Introduction

This guide is for those who want to use HCC Embedded's MMC and SD Media Driver for AM3xxx processors from Texas Instruments Incorporated. This supports both the AM37x and AM335x device families. This guide covers all aspects of configuration and use.

This media driver conforms to the [HCC Media Driver Interface Specification](#). It provides an interface for a file system to read from and write to Secure Digital (SD) or MultiMediaCard (MMC) storage devices. The file system handles all drives identically, regardless of their internal design features.

The diagram below shows a typical system architecture including a file system, media driver and media.

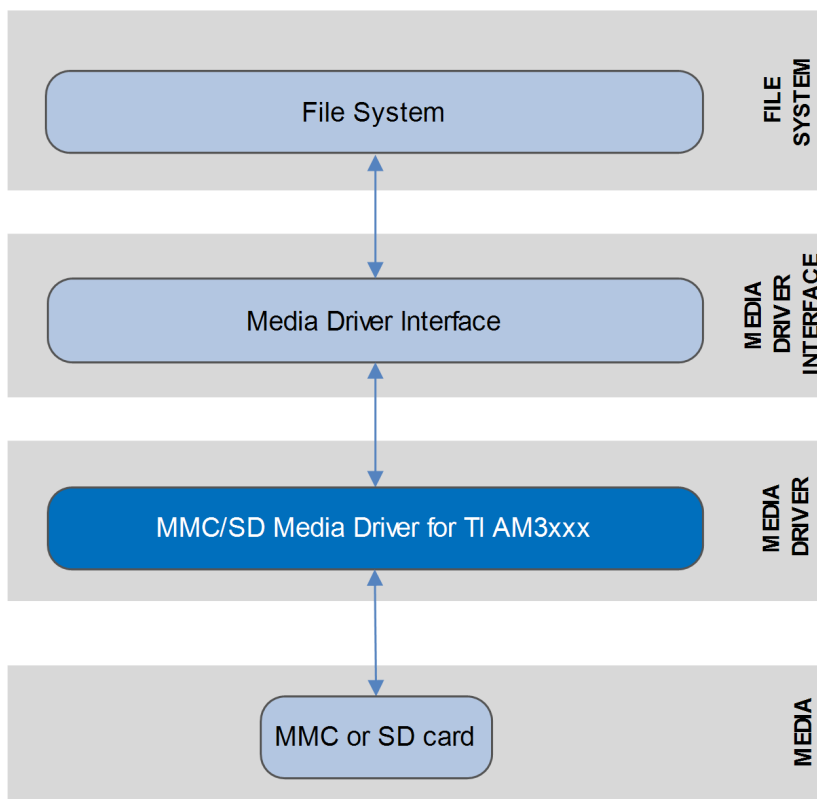

## 1.2 Feature Check

The main features of the media driver are the following:

- Conforms to the HCC Advanced Embedded Framework.
- Designed for integration with both RTOS and non-RTOS based systems.
- Conforms to the *HCC Media Driver Interface Specification*.
- Supports multiple card types: MMC and SD and also SDHC (SD High Capacity) and SDXC (SD eXtended Capacity).
- Supports eMMC (embedded MMC).
- Supports both AM37x and AM335x devices from Texas Instruments Incorporated.

## 1.3 Packages and Documents

### Packages

The table below lists the packages that you need in order to use this module:

Package	Description
<code>hcc_base_doc</code>	This contains the two guides that will help you get started.
<code>media_drv_base</code>	The base media driver package that includes the framework all media drivers use.
<code>media_drv_mmcsd_am3xxx</code>	The media driver package described in this document.

### Documents

For an overview of HCC file systems and data storage, refer to the [Product Information](#) section of the main HCC website.

Readers should note the points in the [HCC Documentation Guidelines](#) on the HCC documentation website.

#### **HCC Firmware Quick Start Guide**

This document describes how to install packages provided by HCC in the target development environment. Also follow the *Quick Start Guide* when HCC provides package updates.

#### **HCC Source Tree Guide**

This document describes the HCC source tree. It gives an overview of the system to make clear the logic behind its organization.

#### **HCC Media Driver Interface Guide**

This document describes the HCC Media Driver Interface Specification.

#### **HCC MMC and SD Media Driver for TI Am3xxx User Guide**

This is this document.

## 1.4 Change History

This section describes past changes to this manual.

- To download this manual or a PDF describing an [earlier software version](#), see [File System Media Driver PDFs](#).
- For the history of changes made to the package code itself, see [History: media\\_drv\\_mmcsd\\_am3xxx](#).

The current version of this manual is 1.40. The full list of versions is as follows:

Manual version	Date	Software version	Reason for change
1.40	2018-09-25	2.06	Added second note on PSP files in <i>Source Files</i> .
1.30	2018-04-03	2.06	Product renamed from AM37x to AM3xxx. References to AM335x family added.  Removed <i>OS Abstraction Layer</i> section.  <b>psp_tick</b> functions now part of base PSP.
1.20	2017-06-23	2.05	New <i>Change History</i> format.
1.10	2015-05-11	2.05	Various small changes.
1.00	2015-03-20	2.05	First online version.

## 2 Source File List

This section describes all the source code files included in the system. These files follow the HCC Embedded standard source tree system, described in the [HCC Source Tree Guide](#). All references to file pathnames refer to locations within this standard source tree, not within the package you initially receive.

**Note:** Do not modify any files except the configuration file and PSP files.

### 2.1 API Header File

The file `src/api/api_mdriber_mmcsd.h` is the only file that should be included by an application using this module. For details of the single API function, see [Application Programming Interface](#).

### 2.2 Configuration File

The file `src/config/config_mdriber_mmcsd.h` contains all the configurable parameters of the system. Configure these as required. For details of these options, see [Configuration Options](#).

### 2.3 Source Code

The file `src/media-driv/mmcsd/am3xx/mmcsd.c` holds the source code for the media driver. **This file should only be modified by HCC.**

### 2.4 Platform Support Package (PSP) Files

These files in the directory `src/psp/target` provide functions and elements the core code needs to use, depending on the hardware.

**Note:**

- You must modify these PSP implementations for your specific microcontroller and development board; see [PSP Porting](#) for details.
- In the package these files are offset to avoid overwriting an existing implementation. Copy them to the root `hcc` directory for use.

File	Description
<code>mmcsd/psp_mmcsd.c</code> and <code>.h</code>	Source code and header file.
<code>include/hcc_am33x_reg.h</code>	Defines the register settings.



## 2.5 Version Files

The file **src/version/ver\_mdriber\_mmcsd.h** contains the version number of this module. The version number is checked by all modules that use a module to ensure system consistency over upgrades.

The following files contain the version numbers for the PSP.

File	Description
<b>ver_psp.h</b>	PSP version numbers.
<b>ver_psp_mmcsd.h</b>	MMCSd version number.
<b>ver_psp_proc_reg.h</b>	Version number for the register file.

## 3 Configuration Options

Set the system configuration options in the file `src/config/config_mdriver_mmcSD.h`. This section lists the available configuration options and their default values.

### **MMCSD1\_VOLTAGE\_RANGE\_170\_195**

Set this to 1 to set the voltage range in which the MMCHS1 signals operate to 1.7 - 1.95V. The default is 0.

### **MMCSD1\_VOLTAGE\_RANGE\_270\_360**

Keep this at the default of 1 to set the voltage range in which the MMCHS1 signals operate to 2.7 - 3.6V. If you enable the above option, set this to 0.

### **MMCSD2\_VOLTAGE\_RANGE\_170\_195**

Set this to 1 to set the voltage range in which the MMCHS2 signals operate to 1.7 - 1.95V. The default is 0.

### **MMCSD2\_VOLTAGE\_RANGE\_270\_360**

Keep this at the default of 1 to set the voltage range in which the MMCHS2 signals operate to 2.7 - 3.6V. If you enable the above option, set this to 0.

### **MMCSD\_SPEED\_LIMIT**

Set this to 1 when testing MMCHS2 with slow hardware, for example with HCC's daughterboard. The default of zero disables the speed limit.

## 4 Application Programming Interface

This section describes the single function, the structure it uses, and the error codes.

When the media driver is used:

1. The file system calls the media driver's **mmcsd\_initfunc()** function.
2. **mmcsd\_initfunc()** returns a pointer to an **F\_DRIVER** structure containing a set of functions for accessing the media driver.

### 4.1 mmcsd\_initfunc

Use this function to initialize the interface with the driver.

The caller passes a parameter to the initialization function of a conforming driver. The driver returns a pointer to an **F\_DRIVER** structure defining the interface to that driver.

**Note:** The call must allocate or use a static structure for the **F\_DRIVER** structure. It must return a pointer to this structure, which must contain all the driver entry points, and also other data as required.

#### Format

```
F_DRIVER * ( mmcsd_initfunc )( unsigned long driver_param )
```

#### Arguments

Argument	Description	Type
driver_param	This identifies the drive to use. The first drive is 0.  This cannot be greater than (MDRIVER_MAX_VOLUME - 1)	unsigned long

#### Return values

Return value	Description
F_DRIVER *	A pointer to the driver structure, or NULL if the request failed.

## 4.2 F\_DRIVER Structure

This is the format of the *F\_DRIVER* structure. This structure is defined in the [HCC Media Driver Interface Specification](#).

Element	Type	Description
separated	int	Non-zero if the driver is separated.
user_data	unsigned long	User-defined data.
user_ptr	void *	User-defined pointer.
writesector	F_WRITESECTOR	Write a sector to the drive. This is mandatory if format or any write access is required.
writemultiplesector	F_WRITEMULTIPLESECTOR	Write a series of sectors to the drive. If this is unavailable F_WRITESECTOR may be used.
readsector	F_READSECTOR	Read a sector from the drive.
readmultiplesector	F_READMULTIPLESECTOR	Read a series of sectors from the drive. If this is unavailable F_READSECTOR may be used.
getphy	F_GETPHY	Used to get the physical properties of the drive, such as the number of sectors.
getstatus	F_GETSTATUS	(Only for removable drives) Used to test whether a drive has been removed or changed.
release	F_RELEASE	Release any resources associated with a drive when it is freed by the host (file) system.
ioctl	F_IOCTL	Used to send user-defined messages to the driver and get a response.

## 4.3 Error Codes

If a function executes successfully, it returns with MMCSN\_NO\_ERROR, a value of zero. The following table shows the meaning of the error codes.

Return Value	Value	Description
MMCSN_ERR_NOTPLUGGED	-1	For high level.
MMCSN_NO_ERROR	0	Successful execution.
MMCSN_ERR_NOTINITIALIZED	101	Driver not initialized.
MMCSN_ERR_INIT	102	Initialization error.
MMCSN_ERR_CMD	103	Command error.
MMCSN_ERR_WRITEPROTECT	104	Media is write-protected.
MMCSN_ERR_NOTAVAILABLE	105	Media not available.

# 5 Integration

This section describes all aspects of the module that require integration with your target project. This includes porting and configuration of external resources.

## 5.1 PSP Porting

The module makes use of the following PSP functions. These functions are provided by the Platform Support Package (PSP) to perform various tasks. Their design makes it easy for you to port them to work with your hardware solution.

The module makes use of the following standard PSP functions:

Function	Package	Element	Description
<b>psp_tick_init()</b>	psp_base	psp_tick	Initializes the timer.
<b>psp_get_tick_count()</b>	psp_base	psp_tick	Gets the current tick count.